



Brushed Paint

Artistic Paint

MINIMALIST DESIGN AESTHETICS OF MODERN ARCHITECTURE

Brushed Paint

Artistic Paint



Applications

Suitable for interior walls, such as high-end banquet halls, luxury boutiques, upscale villas, hotels, etc.

Elastic textured paint is a high-grade wall coating made from elastic acrylic copolymers and imported additives, also known as texture or artistic paint.

Eggshell Texture, Soft Luster

Main Components



Calcium powder



Titanium dioxide



Tactile/hand-feel emulsion



Additives

Technical Data

Surface dry

<2h (25-27°C)

Touch dry

<4h (25-27°C)

Hard dry

>24h (25-27°C)

Coating layer

2 times

Service life

>10 years

Coating rate

1.2-1.3Kg/m² *

Storage conditions

<30°C, cool, dry

Color selection

Multi-color selection

Specification

20Kg/Barrel

Size

32.5*32.5*37.23cm

*Actual coverage will depend on the absorbency of the surface and the method of application.

Product Features



Strong Decorative Effect



Seamless coating, High-hardness



Scratch-resistant; anti-powdering; mildew & moisture resistant



Highly Water- And Stain-Resistant



Simple To Clean And Care For



Low-VOC, non-toxic, and safe for indoor environments.

System Set

01.Primer

The primer is mainly composed of nano-modified acrylic emulsion, which penetrates into the capillaries of the wall to strengthen the substrate, resist alkali, seal the surface, and improve the adhesion of the topcoat. At the same time, it enhances the moisture-proof and mildew-resistant properties of the finish.

Consumption

0.15kg/m²

Packaging

20Kg/Barrel

Size

32.5*32.5*37.23cm

Setting time

Surface dry 2h, Hard dry 4h (25-27°C)

How to use

Ready to use



Surface Preparation

Ensure the substrate is smooth, clean, dry, free from oil, grease, dust, and loose particles, with sufficient strength before application.

For old wall renovation: Remove loose or peeling layers, level the surface, and thoroughly clean dust, grease, and other impurities before application.



Construction Tools

01.Primer



Roller



Wool brush




Protective paper

02.Brushed Paint



Stirring stick





Stainless steel trowel



Patterned/texture roller

Construction Guide














01 Prepare and smooth the substrate.





02 Apply one coat of primer using a roller.

03 Apply the first coat using a specialized roller.

04 Apply the second coat using a specialized roller.

Colour

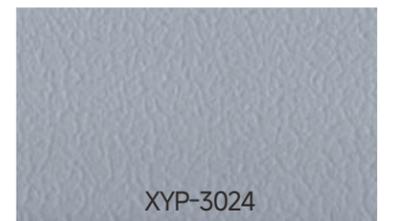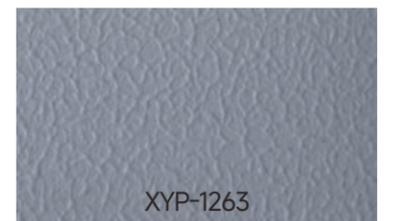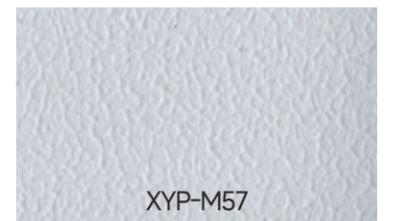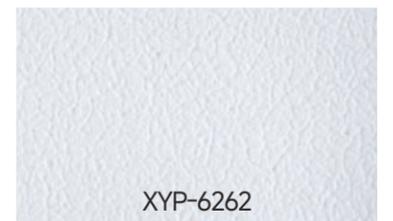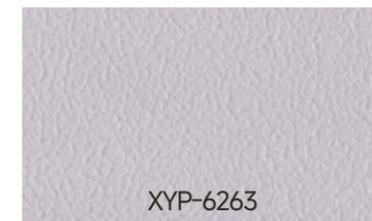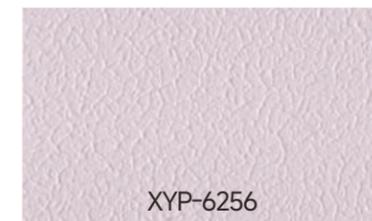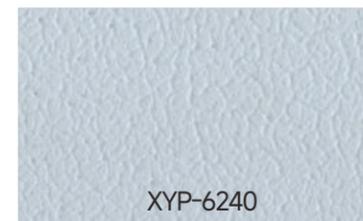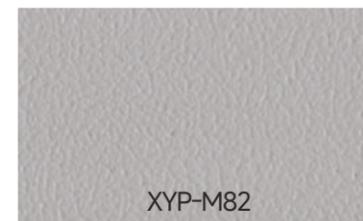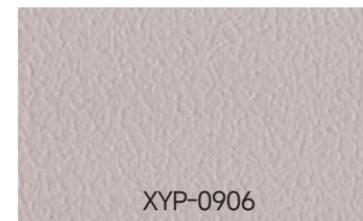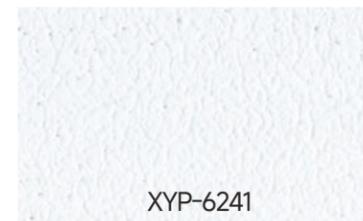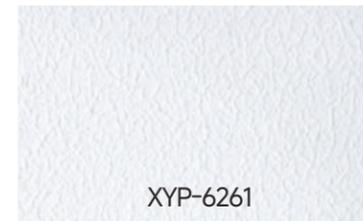

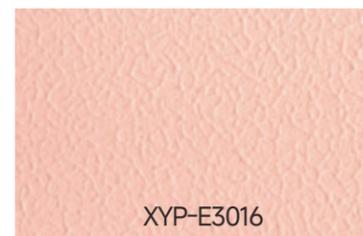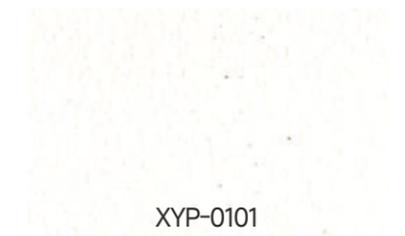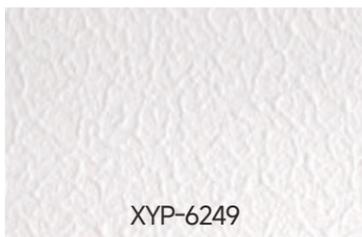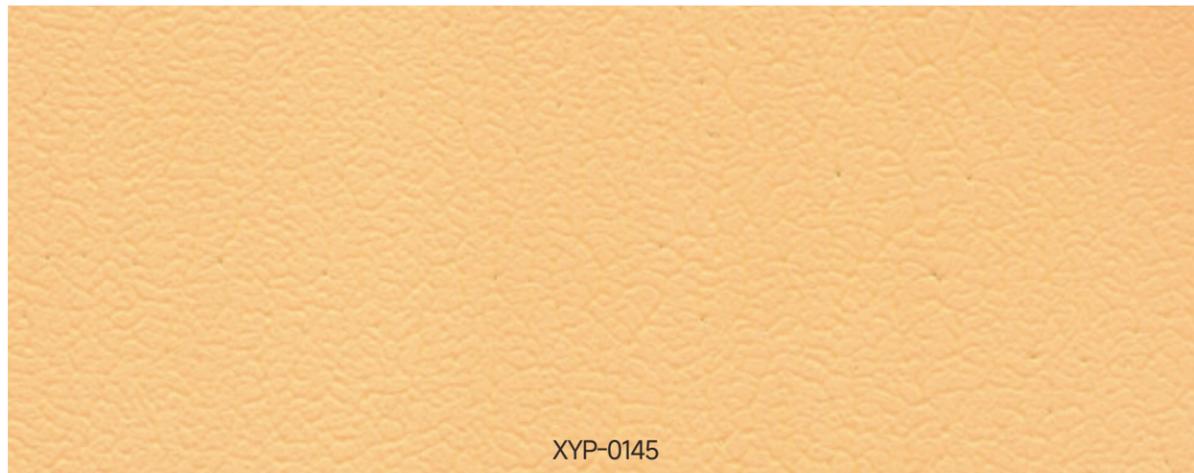





WeChat



Whatsapp

Contact
Number: **+86 189 7000 7181**

JIANGXI SAIBAOLIINDUSTRIAL CO., LTD.

Address: Foreign investment Development District, No.5Gongye Rd, Nanchang, Jiangxi, P.R. China

Website: www.saibaolituliao.com | email: saibaoli@outlook.com

Alibaba: jxsbl.en.alibaba.com