



Eggshell Sheen

Artistic Paint

MINIMALIST DESIGN AESTHETICS OF MODERN ARCHITECTURE

Eggshell Sheen

Artistic Paint



Applications

Suitable for interior walls, such as high-end banquet halls, luxury boutiques, upscale villas, hotels, etc.

Dankeguang is a wall coating with a soft eggshell-like texture and glow, inspired by natural lake ripples. Its subtle, elegant finish and rich color range add a refined and inspiring touch to any interior.

Eggshell Texture, Soft Luster

Main Components



Calcium powder



Titanium dioxide



Eco-friendly resin



Additives

Technical Data

Surface dry

<2h (25-27°C)

Touch dry

<4h (25-27°C)

Hard dry

>24h (25-27°C)

Coating layer

2 times

Service life

>10 years

Coating rate

0.18-0.2Kg/m² *

Storage conditions

<30°C, cool, dry

Color selection

Multi-color selection



Specification

5Kg/Barrel

Size


21*21*21cm

*Actual coverage will depend on the absorbency of the surface and the method of application.

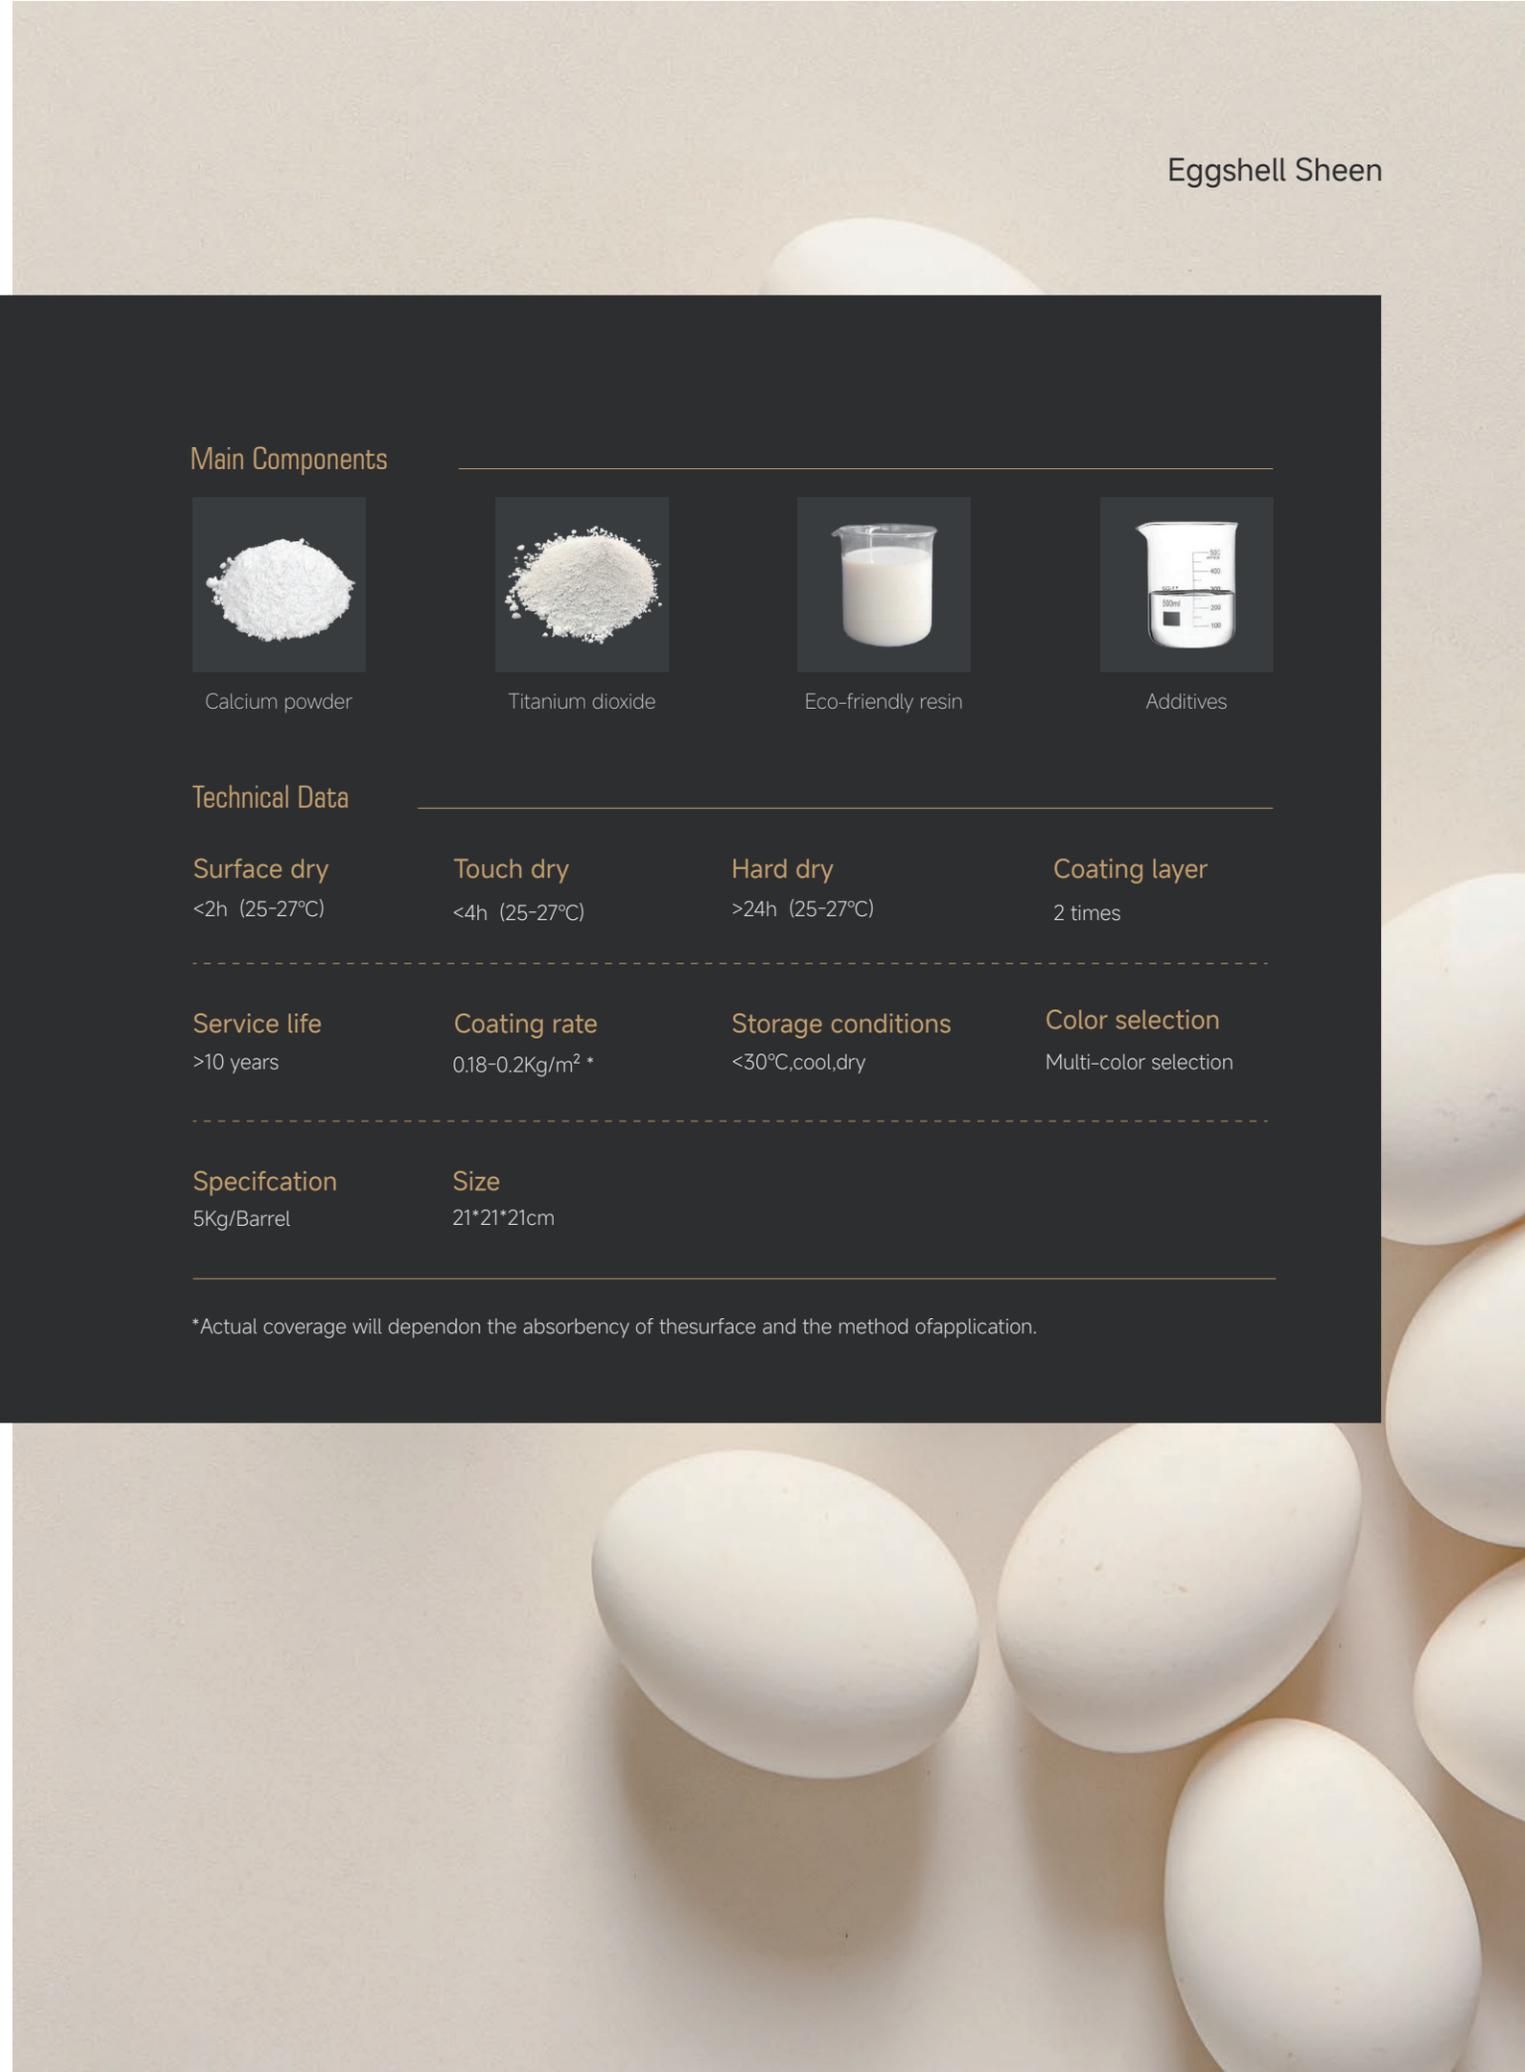

Eggshell Sheen

Eggshell Texture, Soft Luster

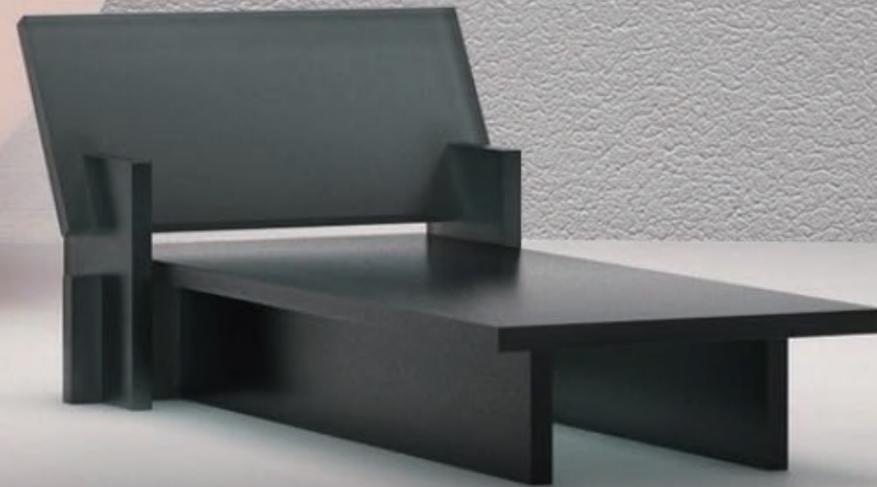

Product Features



Capable Of Creating A Water-Ripple Wall Effect



Seamless coating, Eggshell sheen



Scratch-resistant; anti-powdering; mildew & moisture resistant



Highly Water- And Stain-Resistant



Simple To Clean And Care For



Low-VOC, non-toxic, and safe for indoor environments.

System Set

01.Primer

The primer is mainly composed of nano-modified acrylic emulsion, which penetrates into the capillaries of the wall to strengthen the substrate, resist alkali, seal the surface, and improve the adhesion of the topcoat. At the same time, it enhances the moisture-proof and mildew-resistant properties of the finish.

Consumption

Packaging

20Kg/Barrel

Size

32.5*32.5*37.23cm

Setting time

Surface dry 2h, Hard dry 4h (25-27°C)

How to use

Ready to use



Surface Preparation



Ensure the substrate is smooth, clean, dry, free from oil, grease, dust, and loose particles, with sufficient strength before application.

For old wall renovation: Remove loose or peeling layers, level the surface, and thoroughly clean dust, grease, and other impurities before application.

Construction Tools

01.Primer



Roller



Wool brush



Protective paper

02.Eggshell Sheen



Stirring stick



Stainless steel trowel



Pull Texture brush

Construction Guide



Step 1



Step 2



Step 3



Step 4

01

Prepare and smooth the substrate.

02

Apply one coat of primer using a roller.

03

Dilute eggshell paint with 5%–10% water and roll the first coat.

04

Dilute eggshell paint with 5%–10% water and roll the second coat.



6242

Colour




MC-6267



MC-6266



MC-6262

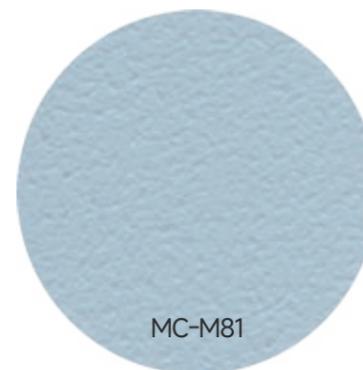


MC-M81




MC-6240




MC-M41

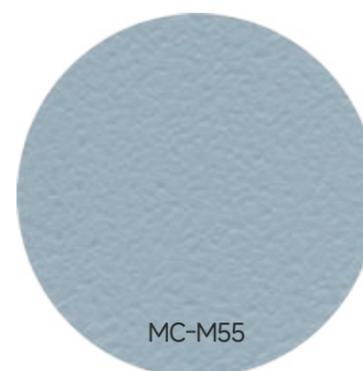


MC-M55

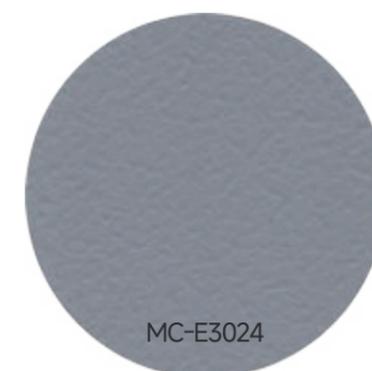


MC-E3024

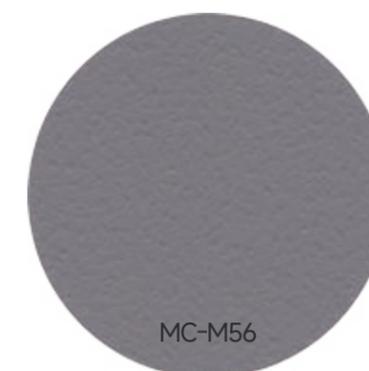

MC-M56

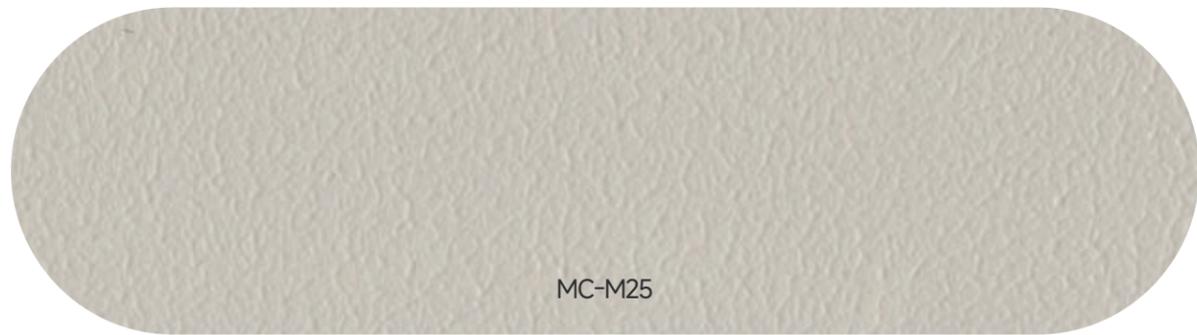

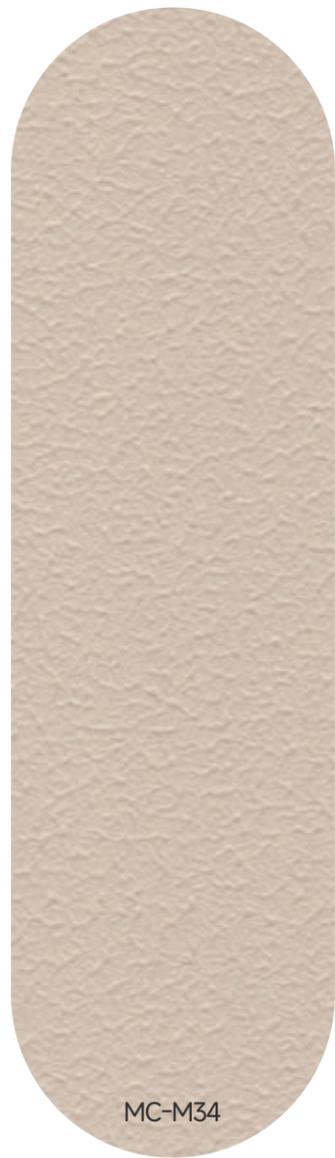

MC-M34



MC-M14



MC-M31



MC-6265



MC-6244



MC-M23




MC-M26



MC-M18



MC-6264




MC-M59




MC-M82



MC-0906



MC-M86



MC-E3025



MC-6261




MC-0932




MC-6263



MC-6268



MC-0552

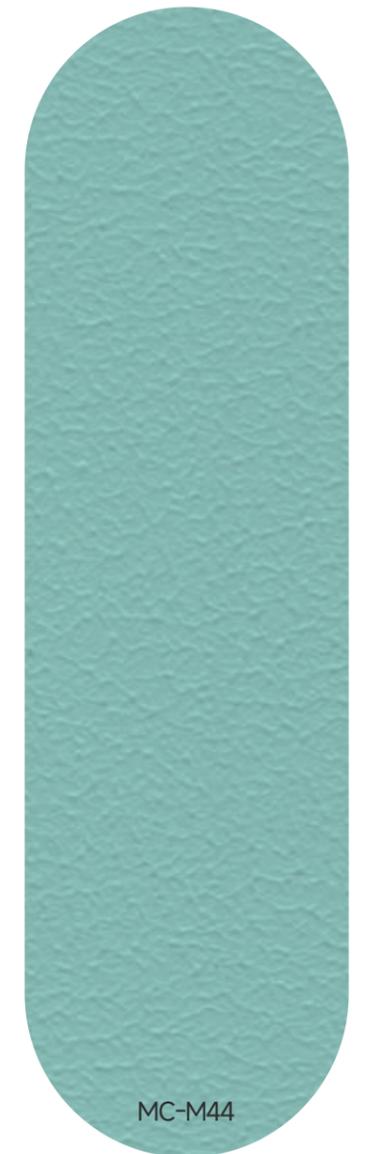

MC-M44



WeChat



Whatsapp

Contact Number: **+86 189 7000 7181**

JIANGXI SAIBAOLIINDUSTRIAL CO., LTD.

Address: Foreign investment Development District, No.5Gongye Rd, Nanchang, Jiangxi, P.R. China

Website: www.saibaolituliao.com | email: saibaoli@outlook.com

Alibaba: jxsbl.en.alibaba.com