



FAUX STONE PAINT SERIES



LYCHEE STONE COLOR

FAUX STONE PAINT

SAIBAOLI IMITATION STONE PAINT RESTORE THE THE TEXTURE OF REAL SFONE



WeChat



Whatsapp

Contact Number: **+86 189 7000 7181**

JIANGXI SAIBAOLI INDUSTRIAL CO., LTD.

Address: Foreign Investment Development District, No.5 Gongye Rd., Nanchang, Jiangxi, P.R. China

Website: www.saibaolituliao.com | email: saibaoli@outlook.com

Alibaba: jxsbl.en.alibaba.com

Lychee Stone Color

Product Introduction

Lishicai is an upgraded version of Jingcai Stone, crafted with high-density emulsion and carefully graded colored sand to accurately reproduce customized color patterns and the distinctive texture of lychee-faced stone.

The optimized formula significantly enhances the physical and chemical properties, giving the coating superior hardness and excellent wear resistance.



Applications

Residential Complex / Office Building / School / Villa / Hospital

It is suitable for the decoration of the exterior walls of self-built villas, high-end residential communities, government office buildings, schools, hospitals and other buildings.

Product Features



Litchi Pattern Stone Texture

Precisely replicates the delicate texture and three-dimensional effect of natural stone, delivering an authentic touch and premium visual appeal that significantly enhances architectural decoration.



Flexible And Crack Resistant

High extensibility adapts to minor substrate deformations, ensuring resistance to cracking even under significant temperature variations or slight vibrations, with excellent durability.



Low VOC Formulation

Eco-friendly and safe, odor-free during application, compliant with green building standards, and suitable for diverse environments.



High Weather Resistance

Resist extreme climates such as ultraviolet rays, high temperatures, and severe cold, and maintain bright colors and undamaged coatings for a long time without fading or peeling.



Stain Resistant And Waterproof


Superior surface density for anti permeation, easily handling rainwater and stains



High Hardness

Durable and scratch-resistant, it protects the base material while enhancing the overall durability.

Components

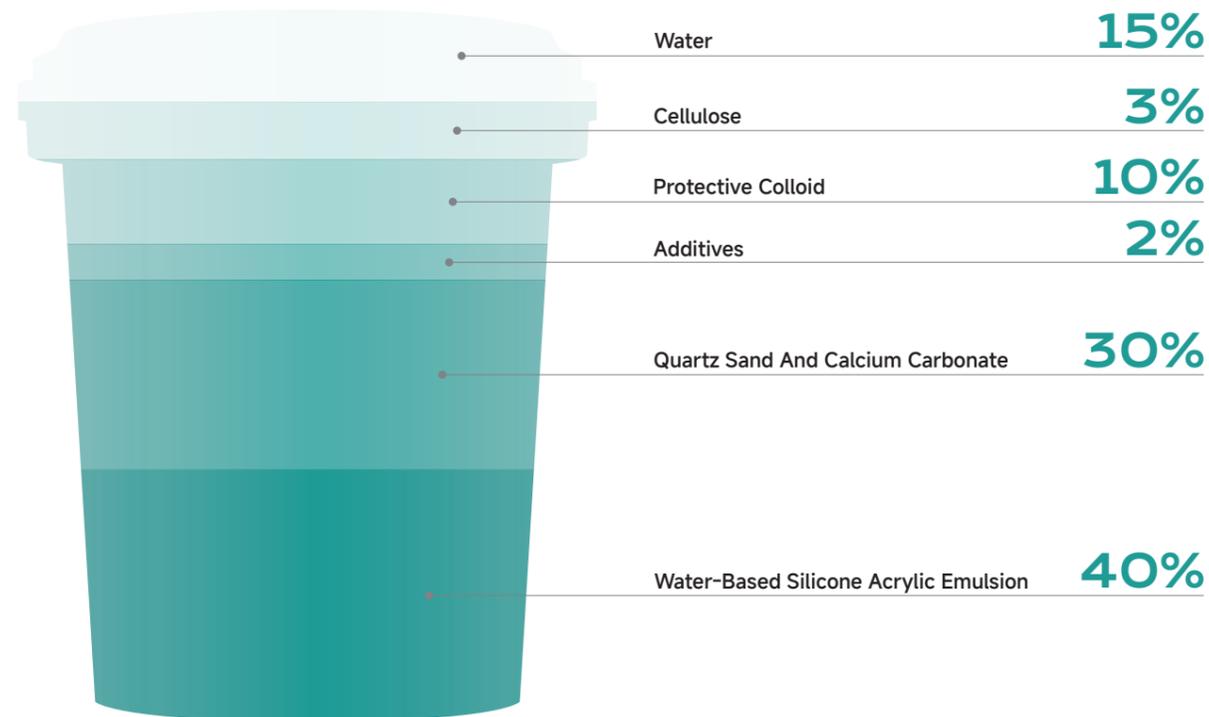

Technical Data


<4H Surface dry <8H Touch dry >24H Hard dry



At an environmental temperature of 25-27°C

Thickness About / Around 1.5 mm	Coating rate / 1.8-2.2Kg/m ² *	Coating layer / 3 times
Service life / >10 years	Color selection / Multi-color selection	Application method / Spraying
Storage conditions / <30°C,cool,dry	Specification / 20Kg/Barrel	Size / 35*25.6*39 cm

*Actual coverage will depend on the absorbency of the surface and the method of application.

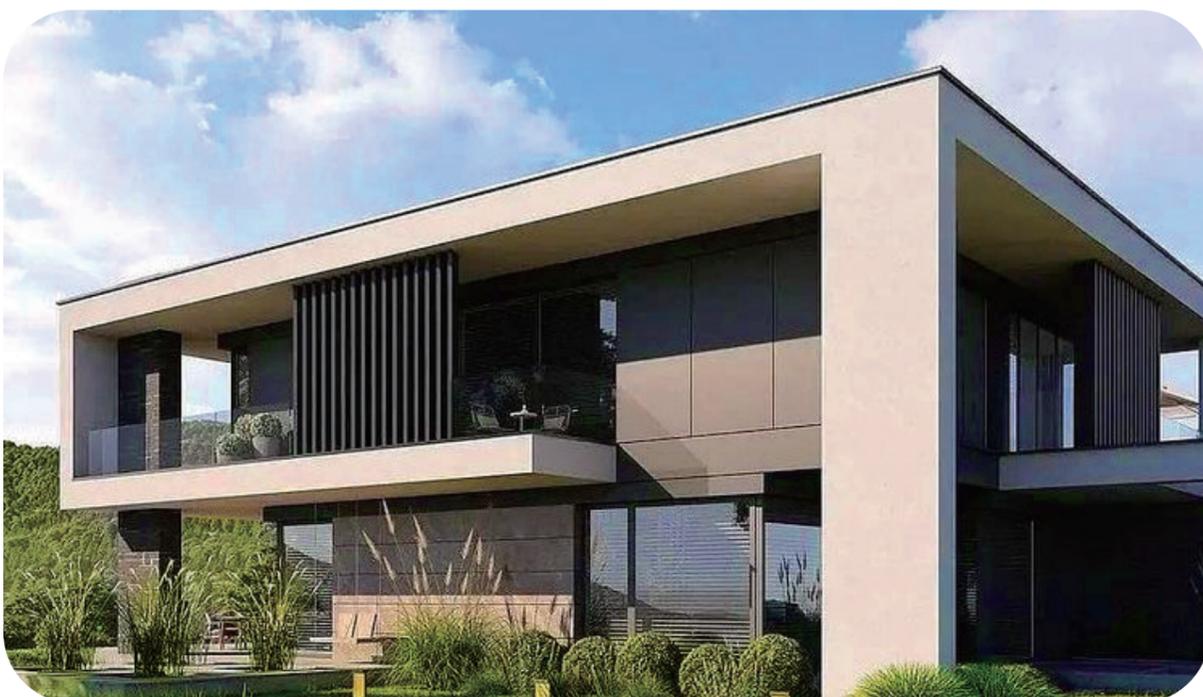

System Set

01.Primer

The primer is mainly composed of nano-modified acrylic emulsion, which penetrates into the capillaries of the wall to strengthen the substrate, resist alkali, seal the surface, and improve the adhesion of the topcoat. At the same time, it enhances the moisture-proof and mildew-resistant properties of the finish.

80% Aqueous emulsion
1% additive
19% water

Consumption / 0.15kg/m²/Apply twice
 Packaging / 20Kg/Barrel
 Size / 32.5*32.5*37.23cm
 Setting Time / Surface dry 2h, Hard dry 4h (25-27°C)



02.Mid Coat

Mid-coat paint is an exterior emulsion paint made from high-grade resin. It enhances the adhesion between paint layers, improves coverage, makes the coating more uniform and full, and provides a stable base for the topcoat.

30% Water-based emulsion
15% Titanium dioxide
30% Calcium powder
2% Additives
23% Water

Consumption / 0.22-0.29 kg/m²
 Packaging / 20Kg/Barrel
 Size / 32.5*32.5*37.23cm
 Setting Time / Surface dry 2h, Hard dry 4h (25-27°C)



03.Topcoat


The topcoat is formulated with special resin materials as the main component, refined with high-quality additives. It provides a strong and weather-resistant protective layer that enhances surface smoothness and gloss, while offering multiple protections such as UV resistance, scratch resistance, anti-mold, and waterproofing, thereby improving both the durability and appearance of the

80% Water based silicone acrylic emulsion
2% Additives
18% Water

Consumption / 0.15kg/m²/Apply twice
 Packaging / 20Kg/Barrel
 Size / 32.5*32.5*37.23cm
 Setting Time / Surface dry 2h, Hard dry 4h (25-27°C)



Construction Tools

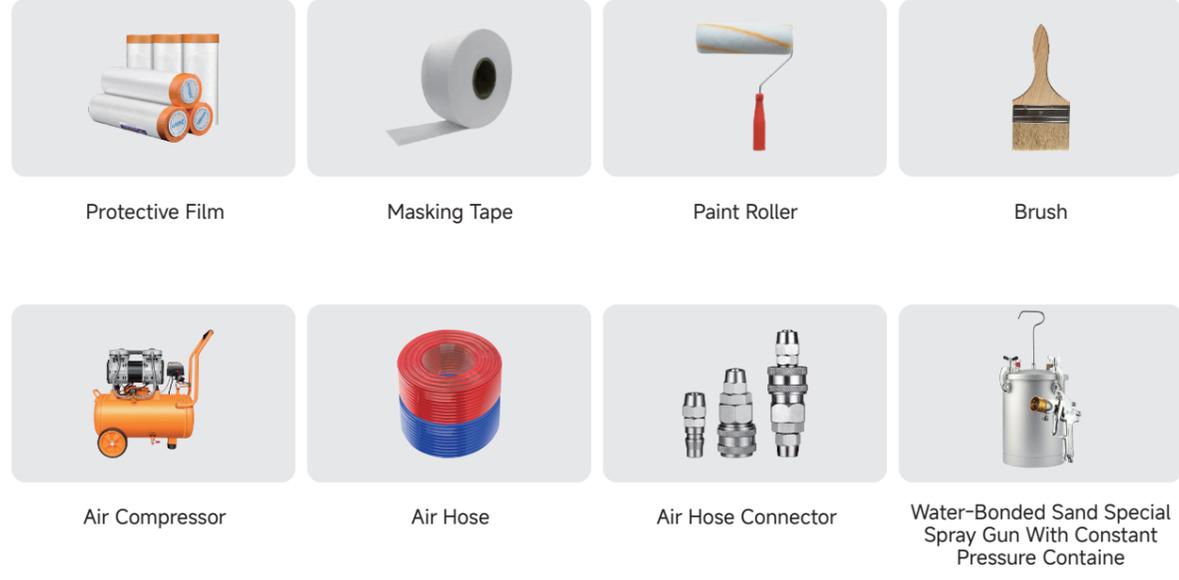



Surface Preparation



Ensure the substrate is smooth, clean, dry, free from oil, grease, dust, and loose particles, with sufficient strength before application.

For old wall renovation: Remove loose or peeling layers, level the surface, and thoroughly clean dust, grease, and other impurities before application.

Construction Guide

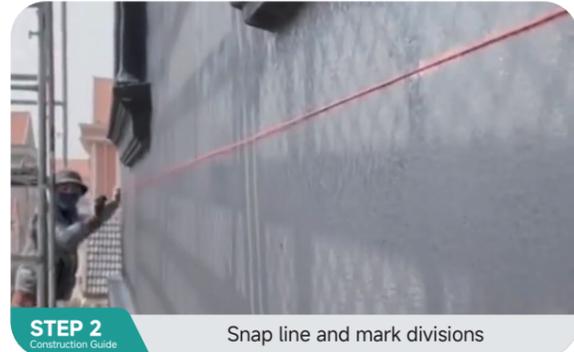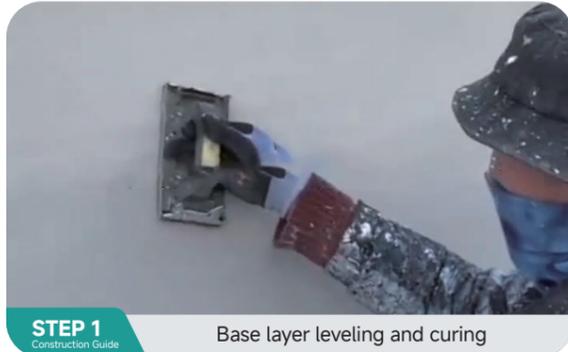

Lychee Stone Color



Hibiscus white



Saudi White



Peach Blossom Red



Wulian Red



Purple Mountain Red

Note: due to the natural source of stone, it is normal that there is a little deviation in color. It is normal to pick up the goods at an interval. If there is a deviation in color, no notice will be given.



LSC-6607

Garnet




LSC-6608

Pink Porrino



LSC-6609

Ocean Red

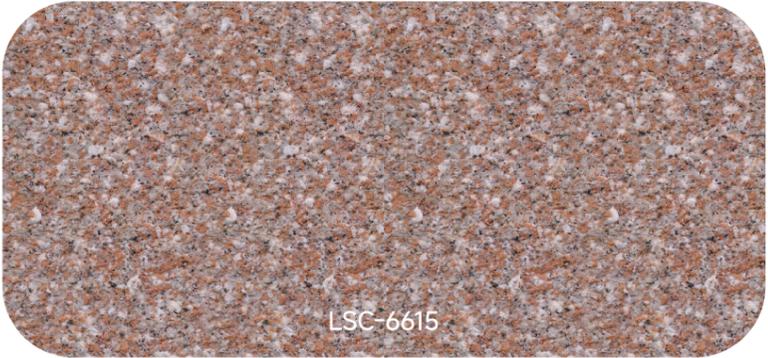


LSC-6615

Xinjiang Red



LSC-6616

Pearl White

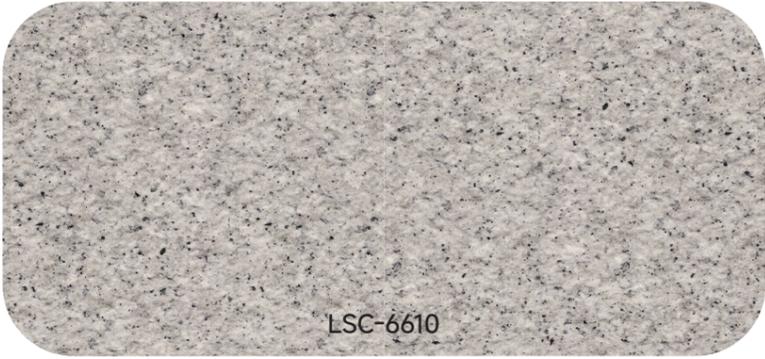

LSC-6610

Earl Grey




LSC-6611

Qingdao Rust



LSC-6617

Black and White

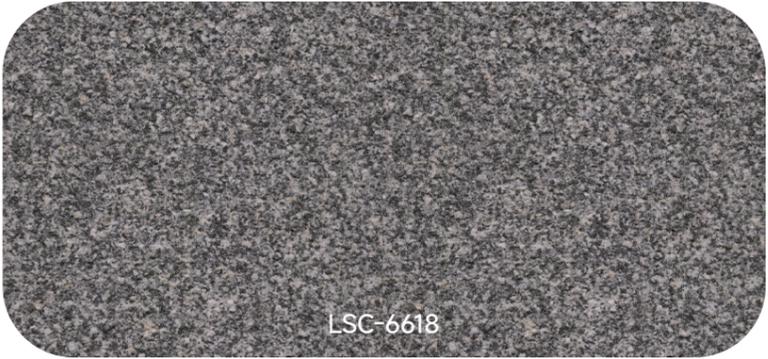

LSC-6618

Yamon Black



LSC-6612

Tianshan Red



LSC-6613

Qitai Stone



LSC-6619

Chengde Green



LSC-6620

Yellow Rust Stone



LSC-6621

Sea-Wave Flower