



FAUX STONE PAINT SERIES



# REAL STONE PAINT

## FAUX STONE PAINT

SAIBAOLI IMITATION STONE PAINT RESTORE THE THE TEXTURE OF REAL SFONE



WeChat



Whatsapp

Contact Number: **+86 189 7000 7181**

**JIANGXI SAIBAOLI INDUSTRIAL CO., LTD.**

Address: Foreign Investment Development District, No.5 Gongye Rd., Nanchang, Jiangxi, P.R. China

Website: [www.saibaolituliao.com](http://www.saibaolituliao.com) | email: [saibaoli@outlook.com](mailto:saibaoli@outlook.com)

Alibaba: [jxsbl.en.alibaba.com](http://jxsbl.en.alibaba.com)

# Real Stone Paint

## Product Introduction

Real stone paint is refined with a special synthetic resin emulsion, providing an economical and efficient stone-like finish solution for exterior walls. Compared with traditional dry-hanging stone, real stone paint offers stronger construction adaptability, allowing easy spraying on complex curved structures, adapting to substrates of varying roughness, enabling flexible customization of rich colors, and effectively covering minor surface imperfections.



## Applications

High-End Banquet Halls / Luxury Boutiques / Upscale Villas / Hotels

Suitable for interior walls, such as high-end banquet halls, luxury boutiques, upscale villas, hotels, etc.



Product Features



**Natural Colored Sand**  
 Carefully selected natural mineral colored sand, showcasing the endless variations of the natural spectrum with stable and long lasting colors.

**High Weather Resistance**  
 Resist extreme climates such as ultraviolet rays, high temperatures, and severe cold, and maintain bright colors and undamaged coatings for a long time without fading or peeling.

**Powerful Self Cleaning**  
 Cleans effortlessly with rainwater, significantly reducing exterior wall cleaning costs

**Low VOC Formulation**  
 Eco-friendly and safe, odor-free during application, compliant with green building standards, and suitable for diverse environments.

**Flexible And Crack Resistant**  
 High extensibility adapts to minor substrate deformations, ensuring resistance to cracking even under significant temperature variations or slight vibrations, with excellent durability.

Components



Technical Data

**<4H** Surface dry      **<8H** Touch dry      **>24H** Hard dry



At an environmental temperature of 25-27°C

Thickness / 2-3 mm	Coating rate / 3-3.5Kg/m <sup>2</sup> *	Coating layer / 1-2 times
Service life / >10 years	Color selection / Multi-color selection	Application method / Troweling
Storage conditions / <30°C,cool,dry	Specification / 20Kg/Barrel	Size / 35*25.6*39 cm

\*Actual coverage will depend on the absorbency of the surface and the method of application.

## System Set

### 01.Primer

The primer is mainly composed of nano-modified acrylic emulsion, which penetrates into the capillaries of the wall to strengthen the substrate, resist alkali, seal the surface, and improve the adhesion of the topcoat. At the same time, it enhances the moisture-proof and mildew-resistant properties of the finish.

**80%** Aqueous emulsion      **1%** additive      **19%** water

Consumption / 0.15kg/m<sup>2</sup>/Apply twice      Packaging / 20Kg/Barrel  
 Size / 32.5\*32.5\*37.23cm      Setting Time / Surface dry 2h, Hard dry 4h (25-27°C)



### 02.Mid Coat

Mid-coat paint is an exterior emulsion paint made from high-grade resin. It enhances the adhesion between paint layers, improves coverage, makes the coating more uniform and full, and provides a stable base for the topcoat.

**30%** Water-based emulsion      **15%** Titanium dioxide      **30%** Calcium powder  
**2%** Additives      **23%** Water

Consumption / 0.22-0.29 kg/m<sup>2</sup>      Packaging / 20Kg/Barrel  
 Size / 32.5\*32.5\*37.23cm      Setting Time / Surface dry 2h, Hard dry 4h (25-27°C)



### 03.Topcoat

The topcoat is formulated with special resin materials as the main component, refined with high-quality additives. It provides a strong and weather-resistant protective layer that enhances surface smoothness and gloss, while offering multiple protections such as UV resistance, scratch resistance, anti-mold, and waterproofing, thereby improving both the durability and appearance of the coating.

**80%** Water based silicone acrylic emulsion      **2%** Additives      **18%** Water

Consumption / 0.15kg/m<sup>2</sup>/Apply twice      Packaging / 20Kg/Barrel  
 Size / 32.5\*32.5\*37.23cm      Setting Time / Surface dry 2h, Hard dry 4h (25-27°C)




## Construction Tools



Protective Film



Masking Tape



Paint Roller



Brush



Air Compressors With Power Above 3 Kilowatts



Pecial Spray Cans For Real Stone Paint




## Surface Preparation



**Ensure the substrate is smooth, clean, dry, free from oil, grease, dust, and loose particles, with sufficient strength before application.**

**For old wall renovation:** Remove loose or peeling layers, level the surface, and thoroughly clean dust, grease, and other impurities before application.

Construction Guide

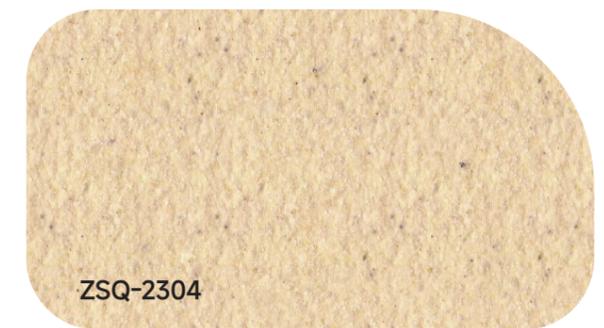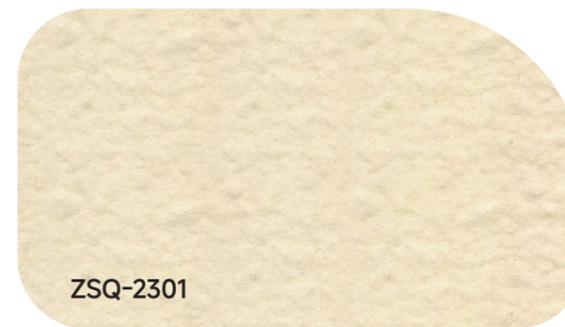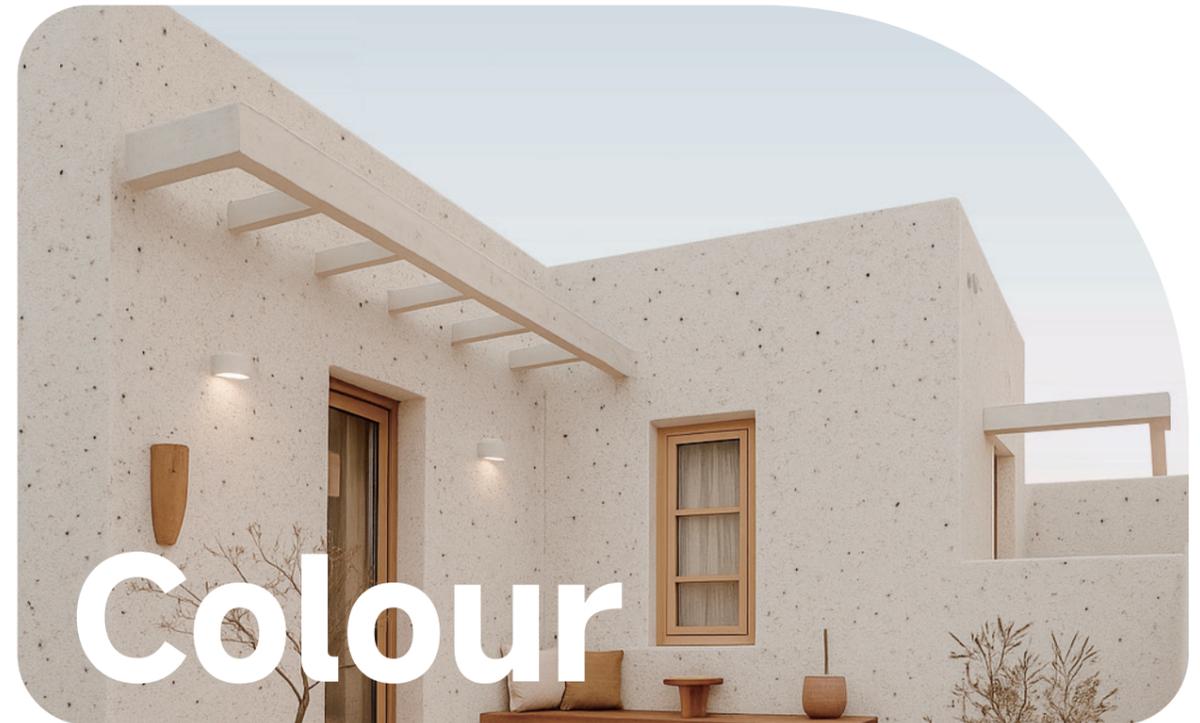

Note: due to the natural source of stone, it is normal that there is a little deviation in color. It is normal to pick up the goods at an interval. If there is a deviation in color, no notice will be given.

Saibaoli Faux Stone Paint







Real Stone Paint



Saibaoli Faux Stone Paint

Real Stone Paint

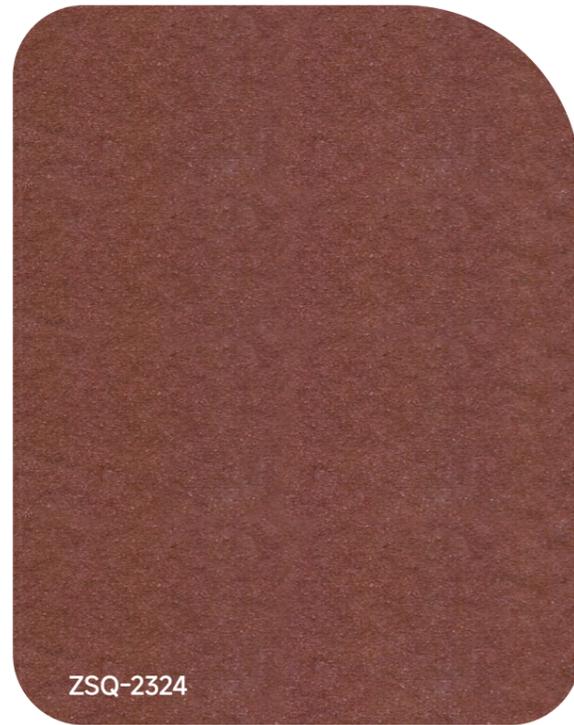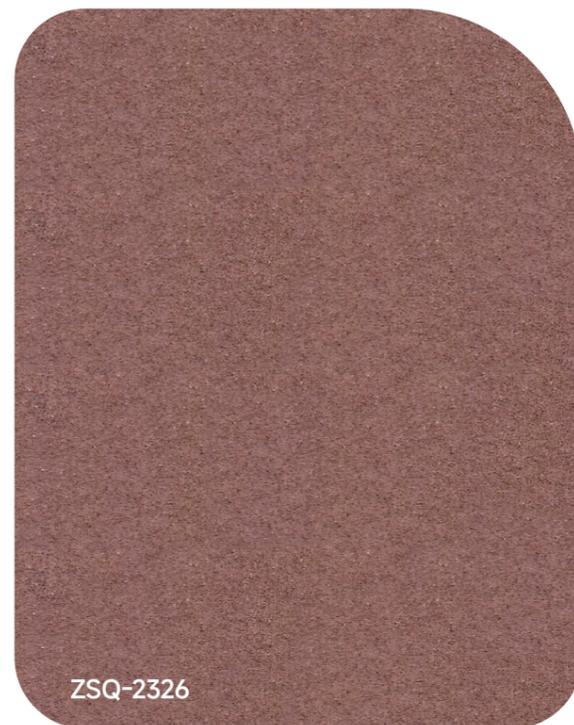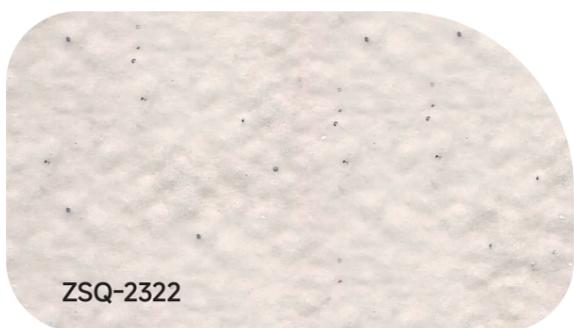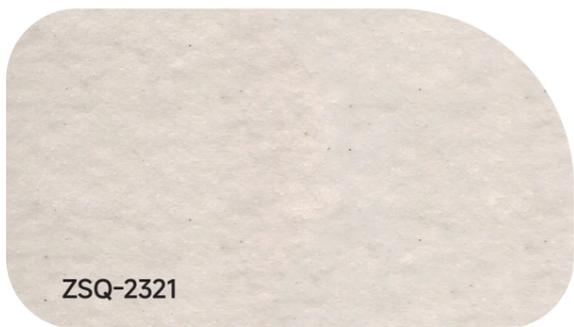

Saibaoli Faux Stone Paint

Real Stone Paint

