

SaiBaoLi



---

# Velvet

Artistic Paint

MINIMALIST DESIGN AESTHETICS OF MODERN ARCHITECTURE



## Velvet

Artistic Paint



### Applications

Suitable for living rooms, bedrooms, feature walls, hotels, and high-end commercial spaces.

Velvet paint is a new decorative coating that mimics the soft, silky look of velvet fabric, creating a luxurious and elegant atmosphere for interior spaces.

Stable color, long-lasting without fading or distortion


### Main Components



Pearlescent powder



Tactile resin



Additives

### Technical Data

<b>Thickness</b> 20-60 μm	<b>Surface dry</b> <2h (25-27°C)	<b>Touch dry</b> <4h (25-27°C)	<b>Hard dry</b> >24h (25-27°C)
<b>Service life</b> >10 years	<b>Coating rate</b> 0.2-0.25Kg/m <sup>2</sup> *	<b>Coating layer</b> 2 times	<b>Color selection</b> Multi-color selection
<b>Storage conditions</b> <30°C, cool, dry	<b>Specifcation</b> 5Kg/Barrel	<b>Size</b> 21*21*21 cm	

\*Actual coverage will depend on the absorbency of the surface and the method of application.



Resin Washed Stone

# Velvety Touch

## Product Features



### Luxurious Appearance

Creates a soft, elegant velvet-like finish that enhances interior aesthetics.



### Unique Texture

Smooth and delicate touch with subtle light reflection for a sophisticated look.



### Durable Performance

Resistant to fading, peeling, and daily wear, maintaining long-lasting beauty.



### Easy Maintenance

Simple to clean and care for.



### Eco-Friendly

Low-VOC, non-toxic, and safe for indoor environments.

# System Set

## 01.Primer

The primer is mainly composed of nano-modified acrylic emulsion, which penetrates into the capillaries of the wall to strengthen the substrate, resist alkali, seal the surface, and improve the adhesion of the topcoat. At the same time, it enhances the moisture-proof and mildew-resistant properties of the finish.

### Consumption

0.15kg/m<sup>2</sup>

### Packaging

20Kg/Barrel

### Size

32.5\*32.5\*37.23cm

### Setting time

Surface dry 2h, Hard dry 4h (25-27°C)

### How to use

Ready to use



## Surface Preparation



Ensure the substrate is smooth, clean, dry, free from oil, grease, dust, and loose particles, with sufficient strength before application.

**For old wall renovation:** Remove loose or peeling layers, level the surface, and thoroughly clean dust, grease, and other impurities before application.

## Construction Tools

### 01.Primer



Hand drill



Roller



Wool brush



Protective paper

### 02.Velvet



Roller



Velvet sander



Damp cloth

## Construction Guide



01

Dilute the colored primer with 5%–10% water



02

Apply two coats of the same colored primer using a roller



03

Apply the first coat of velvet finish with a roller (texturing is optional)



04

Apply the second coat of velvet finish with a roller (begin sanding the texture immediately after rolling and refine it when it's about 80% dry)




# Colour



Pink White




Ivory White

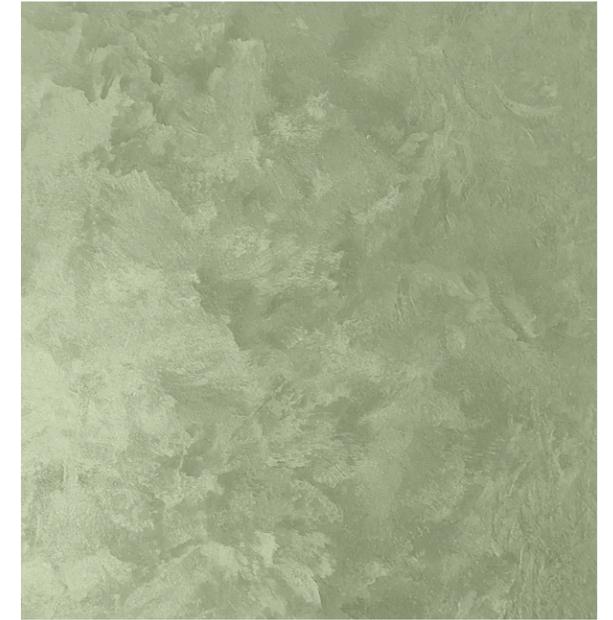

Boeing Aircraft



Light Yellow Gray

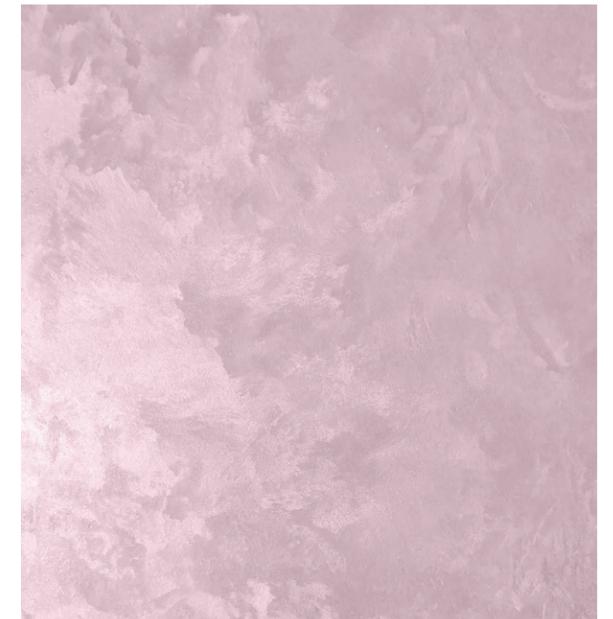


Coffee Red





Brushto Blue

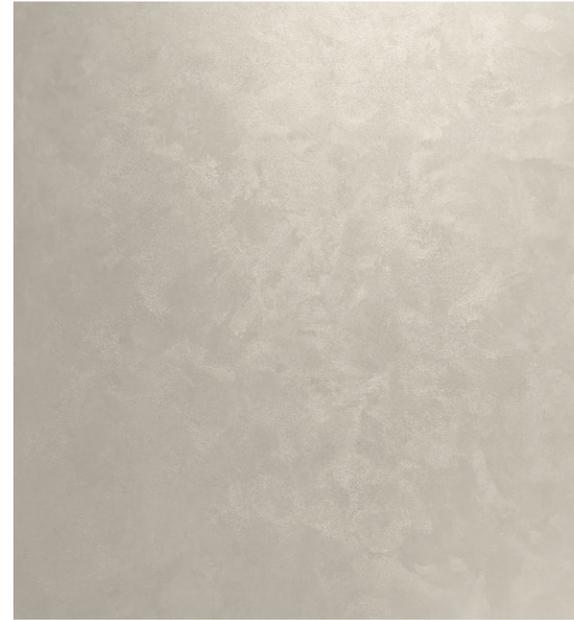

Cocoa Custard



Spacewalk



Baby Blue



Silver Coin



WeChat



Whatsapp

Contact Number: **+86 189 7000 7181**

**JIANGXI SAIBAOLIINDUSTRIAL CO., LTD.**

Address: Foreign investment Development District, No.5Gongye Rd, Nanchang, Jiangxi, P.R. China

Website: [www.saibaolituliao.com](http://www.saibaolituliao.com) | email: [saibaoli@outlook.com](mailto:saibaoli@outlook.com)

Alibaba: [jxsbl.en.alibaba.com](http://jxsbl.en.alibaba.com)